



Bidirectional converter

PVS980-58BC

FIMER bidirectional converter, PVS980-58BC, is aimed at large-scale grid connected energy storage applications. The converters are available from 727 kVA up to 1045 kVA. PVS980-58BC bidirectional converter is based on the world's leading converter platform used also in FIMER solar inverters ensuring high performance, reliability and availability of global service support.

From 727 to 1045 kVA

World's leading converter platform

Like FIMER central inverters, the PVS980-58BC bidirectional converter has been developed on the basis of decades of experience in the industry and proven technology platform. Unrivalled expertise from the world's market and technology leader in frequency converters is the hallmark of the PVS980-58BC series.

PVS980-58BC bidirectional converter from FIMER

FIMER PVS980-58BC bidirectional converters are ideal for multi-megawatt energy storage systems, providing maximum grid stability for power plants with intermittent energy sources. For power plants combining photovoltaics and energy storage, the common platform shared with PVS980-58BC bidirectional converter and PVS980-58BC central inverter brings synergies in both the availability of service and support personnel and the spare part logistics.

The high DC input voltage, high efficiency, proven components, compact and modular design and a host of life cycle services available ensure FIMER PVS980-58BC bidirectional converters provide a rapid return on investment.

Highlights

- High total performance
- Outstanding endurance for outdoor use
- Full four quadrant active power and reactive power support
- High DC input voltage up to 1500 V_{DC} for minimizing system cost
- Self-contained cooling system suitable for harsh environments
- Compact, modular product design
- Life cycle service and support through FIMER's extensive global service network

Technical data and type							
Product Type designation	PVS980-58BC -727kVA-E	PVS980-58BC -787kVA-F	PVS980-58BC -848kVA-G	PVS980-58BC -909kVA-I	PVS980-58BC -954kVA-J	PVS980-58BC -1000kVA-K	PVS980-58BC -1045kVA-L
Input (DC)							
Full power DC voltage range, (U_{DC}) a 50 °C ¹⁾	680 to 1100 V	737 to 1100 V	794 to 1100 V	850 to 1100 V	893 to 1100 V	935 to 1100 V	978 to 1100 V
DC voltage operating range, (U_{DC}) ¹⁾	680 to 1500 V	737 to 1500 V	794 to 1500 V	850 to 1500 V	893 to 1500 V	935 to 1500 V	978 to 1500 V
Maximum DC voltage ($U_{max(DC)}$)	1500 V	1500 V	1500 V	1500 V	1500 V	1500 V	1500 V
Maximum DC current ($I_{max(DC)}$) at 35 °C	1200 A	1200 A	1200 A	1200 A	1200 A	1200 A	1200 A
Maximum DC current ($I_{max(DC)}$) at 50 °C	1091 A	1091 A	1091 A	1091 A	1091 A	1091 A	1091 A
Number of DC inputs	6 inputs, as option 8, 12 inputs or 16 inputs (+/-) and DC input current measurement						
Max DC short circuit withstand	73 kApeak, 17 MA ² s, external aR fuses required between converter and BES						
DC grounding	Floating only						
DC surge arrester	Type 2 as standard. High Energy Type 1 as option						
DC disconnecter	as option						
Output (AC)							
Output power ($S_{max(AC)}$) at 50 °C	727 kVA	787 kVA	848 kVA	909 kVA	954 kVA	1000 kVA	1045 kVA
Nominal power ($S_{N(AC)}$) at 35 °C	800 kVA	866 kVA	933 kVA	1000 kVA	1050 kVA	1100 kVA	1150 kVA
Maximum AC current ($I_{max(AC)}$) at 50 °C	875 A	875 A	875 A	875 A	875 A	875 A	875 A
Maximum AC current ($I_{max(AC)}$) at 35 °C	962 A	962 A	962 A	962 A	962 A	962 A	962 A
Nominal output voltage ($U_{N(AC)}$) ²⁾	480 V	520 V	560 V	600 V	630 V	660 V	690 V
Output frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Harmonic distortion, current ³⁾	< 3%	< 3%	< 3%	< 3%	< 3%	< 3%	< 3%
Distribution network type	IT	IT	IT	IT	IT	IT	IT
Power factor	Four quadrant						
AC disconnecter / AC breaker	as option						
AC surge arrester	Type 2 as standard. High Energy Type 1 as option						
Efficiency							
Maximum ⁴⁾	98.6%	98.7%	98.7%	98.8%	98.8%	98.8%	98.8%
Auxiliary power consumption							
Max. own consumption in operation	≤ 1500 W	≤ 1500 W	≤ 1500 W	≤ 1500 W	≤ 1500 W	≤ 1500 W	≤ 1500 W
Standby operation consumption	≤ 235 W	≤ 235 W	≤ 235 W	≤ 235 W	≤ 235 W	≤ 235 W	≤ 235 W
Auxiliary voltage source	External, 1 phase auxiliary power input ⁵⁾						

1) Minimum DC ($U_{DC,min}$) for $U_{N(AC)}$ and power factor=1. The minimum DC voltage depends on AC voltage and power factor. The AC dependency follows formula $U_{DC,min} = U_{AC} * \sqrt{2} * 1.002$ with PF=1. Contact FIMER for more information.

2) ±10%

3) At nominal power

4) Without auxiliary power consumption at min U_{DC}

5) As option internal auxiliary power (internal transformer from inverter output)

Technical data and type

Product Type designation	PVS980-58BC -727kVA-E	PVS980-58BC -787kVA-F	PVS980-58BC -848kVA-G	PVS980-58BC -909kVA-I	PVS980-58BC -954kVA-J	PVS980-58BC -1000kVA-K	PVS980-58BC -1045kVA-L
Dimensions and weight							
Width/Height/Depth, mm (W/H/D)	2181/2443/1522						
Weight appr.	2500 kg						
Environmental limits							
Degree of protection ⁶⁾	IP66/UL Type 3R						
Ambient temp. range (nom. ratings) ⁷⁾	-20 °C to +50 °C						
Maximum ambient temperature ⁸⁾	+60 °C						
Relative humidity	5% to 100%						
Maximum altitude (above sea level) ⁹⁾	4000 m						
Maximum noise level ¹⁰⁾	88 dBA						
Protection							
Ground fault monitoring	Yes						
Grid monitoring	Yes						
Anti-islanding	Yes						
DC reverse polarity	Yes						
AC/DC short circuit and overcurrent ¹¹⁾	Yes						
AC/DC overvoltage and temperature	Yes						
Energy Storage firmware							
PQ setpoints	Yes						
Start and stop sequence for battery energy storage system	Yes						
User interface and communications							
Local user interface	Local control panel						
Analog inputs	2 as standard						
Digital inputs/relay outputs	7/1 as standard						
Fieldbus connectivity ¹²⁾	Modbus, Ethernet						
Product compliance ¹³⁾							
Safety and EMC	CE according to LV and EMC directives						
Certifications and approvals	IEC, CEA						
Grid support and grid functions	Reactive power compensation, Power reduction, LVRT, HVRT, FqRT, Anti-islanding						

6) IP66 excluding under pressure testing. IP56 with under pressure

7) -40 °C as option

8) Power derating after 50 °C


9) Derating above 1000 m, as option above 2000 m

10) At partial power typically < 75 dBA


11) DC short circuit protection with external aR fuses

12) More communication options as engineered option

13) Approvals pending, contact FIMER for more information

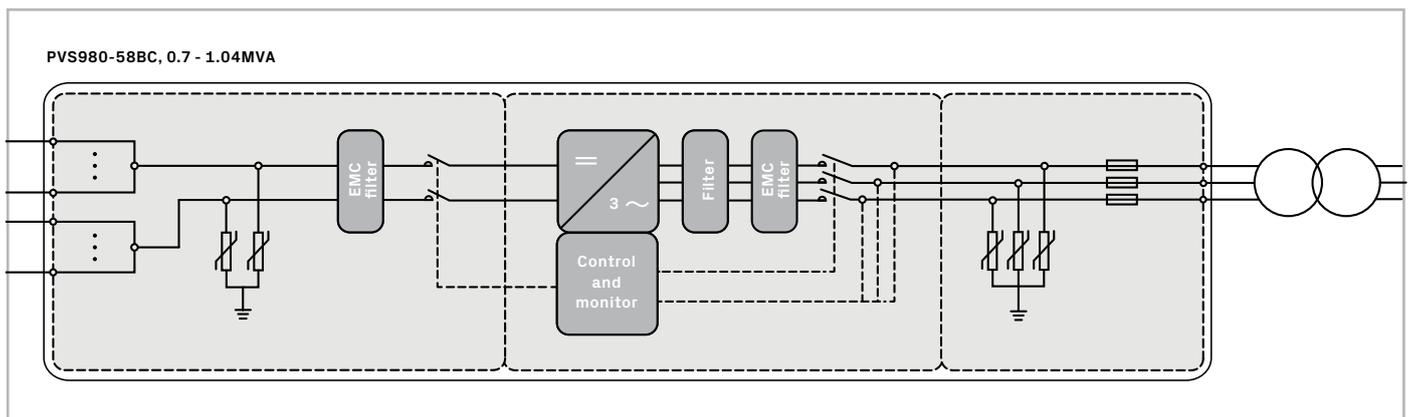PVS980-58BC bidirectional converter block diagram


Battery energy storage system example with FIMER PVS980-58BC bidirectional converter

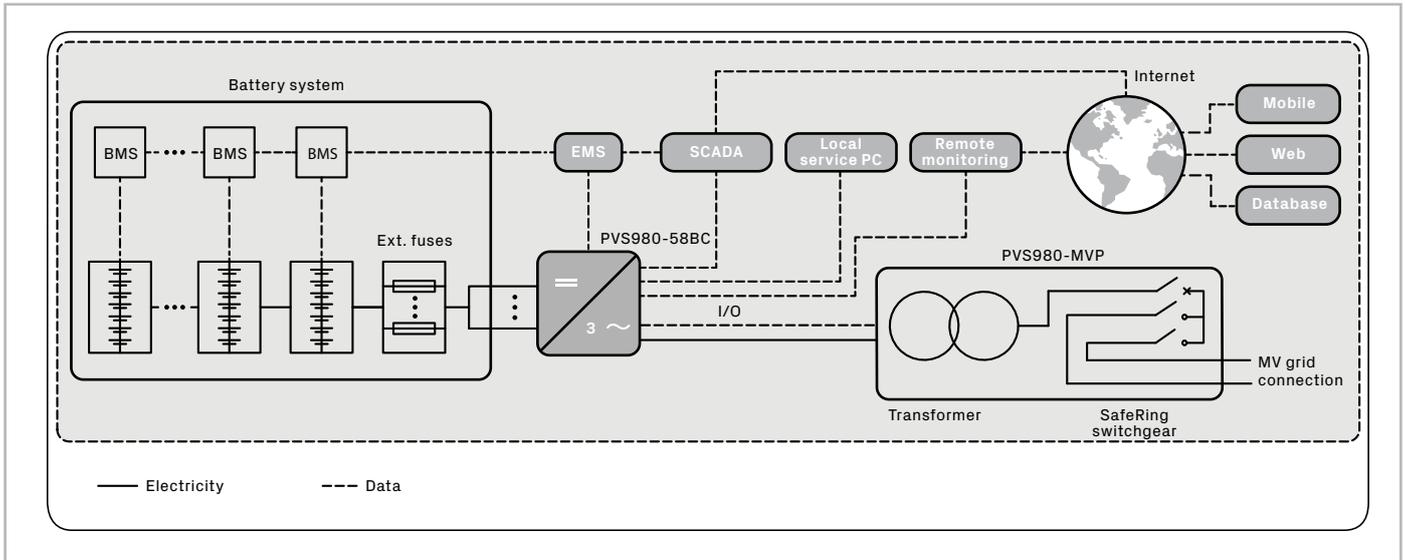

Options

- AC breaker
- AC disconnecter switch
- DC disconnecter switch
- Heavy duty (Type 1) surge protection
- AC busbar interface
- Internal auxiliary power supply
- Fieldbus and Ethernet connections
- High altitude version
- Low temperature version
- Warranty extensions
- Converter care contracts

Related products

- Medium voltage station (transformer and switchgear) as outdoor or containerised solution
- Remote monitoring solutions

Support and service

FIMER supports its customers with a dedicated global service network and provides a complete range of life cycle services from installation and commissioning to preventative maintenance, spare parts, repairs and recycling.



For more information please contact your local FIMER representative or visit:

fimer.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. FIMER does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of FIMER. Copyright© 2023 FIMER. All rights reserved.

