



Central inverter PVS980-58

The new high power FIMER central inverter raises the performance, cost efficiency and ease of installation to new levels. The inverters are aimed at system integrators and end users who require high-performance solar inverters for large photovoltaic (PV) power plants and are optimized for multi-megawatt power plants.

World's leading inverter platform

Like other FIMER central inverters, the PVS980-58 has been developed on the basis of decades of experience in the industry and proven technology platform. Unrivalled expertise from the world's market and technology leader in frequency converters is the hallmark of this solar inverter series.

The PVS980-58 inverter is one of the most efficient and cost-effective ways of converting the direct current (DC) generated by solar modules into high quality and CO₂-free alternating current (AC) that can be fed into the power distribution network.


PVS980-58 central inverters from FIMER

FIMER PVS980-58 central inverters are ideal for large PV power plants. The high DC input voltage, high efficiency, proven components, compact and modular design and a host of life cycle services ensure FIMER PVS980-58 central inverters provide a rapid return on investment.

New extended power range along with fast site installation raises the total cost efficiency to a new level.

Highlights

- High total performance
- Modular product design
- High DC input voltage up to 1500 V_{DC}
- Extensive DC and AC side protection
- Easy to commission, no separate chiller installation
- Fast and easy AC coupling to transformer by busbars
- Versatile design for large-scale PV plants to minimize system costs
- Complete range of industrial data communication options, including remote monitoring
- Life cycle service and support through FIMER's extensive global service network

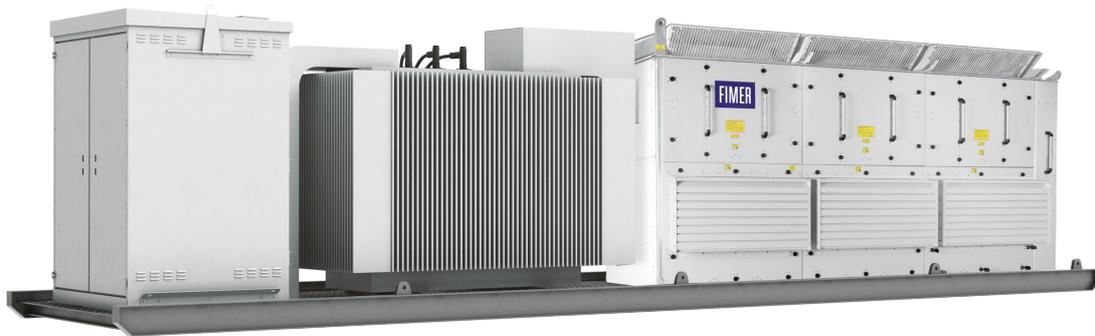

Maximum energy revenues

FIMER central inverters have a high total efficiency. Precise, optimized system control and maximum power point tracking (MPPT) combined with the unit's highly efficient power converter design deliver the maximum energy from the PV modules to the power distribution network. For end users, this generates the highest possible revenues from the energy sales.

Patented cooling system

PVS980-58 inverter utilizes patented self-contained cooling system in power module cooling. This innovative, low-maintenance cooling solution is also used in other industrial applications and is designed for demanding environments.

The cooling system needs no separate commission and it ensures outstanding endurance.

Compact and modular design

PVS980-58 inverters are designed for fast and easy installation. The industrial design and modular platform provide a wide range of options, such as remote monitoring, fieldbus connection and modular and flexible DC input connections. The integrated DC cabinet saves space and costs as the solar array junction boxes can be connected directly to the fused busbars in the DC cabinet. PVS980-58 inverters are customized for the needs of end users and will be available with short delivery times.

Versatile design for large-scale PV plants to minimize system costs

FIMER's PVS980-58 central inverter enables system integrators to design PV power plants that use the optimum combination of inverters with different power ratings.

Equipped with extensive electrical and mechanical protection, the inverters are engineered to provide a long and reliable service life of at least 25 years.

Advanced grid support features

The PVS980-58 software includes all the latest grid support and monitoring features, including active power limitation, fault ride through (FRT) with current feed-in and reactive power control.

Active and reactive power output can be controlled by an external control system or automatically by the inverter.

All grid support functions are parameterized, allowing easy adjusting for local utility requirements. FIMER central inverters are also able to support grid stability at night by providing reactive power with the DC input disconnected.

Technical data and types

Product Type designation, PVS980-58	PVS980-58 -3260-I	PVS980-58 -3423-J	PVS980-58 -3586-K	PVS980-58 -3750-L
Input (DC)				
Maximum recommended input power (PPV,max) ¹⁾	6521 kWp	6847 kWp	7172 kWp	7500 kWp
Maximum DC short circuit current			16 kA	
Maximum operational DC current			3975 A	
Maximum operational DC voltage (U _{max} (DC)) ²⁾			1500 V	
DC voltage range for maximum power (UDC, mpp) @ -20 to +25 °C	850 to 1350 V	893 to 1350 V	935 to 1350 V	978 to 1350 V
DC voltage range for maximum power (UDC, mpp) @ 35 °C	850 to 1250 V	850 to 1250 V	935 to 1250 V	978 to 1250 V
DC voltage range for maximum power (UDC, mpp) @ 50 °C	850 to 1100 V	850 to 1100 V	935 to 1100 V	978 to 1100 V
Number of MPPT trackers			1	
Number of protected DC inputs ³⁾			15 (+/-)	
Output (AC)				
Power @ 25 °C	3260 kVA	3423 kVA	3586 kVA	3750 kVA
AC current @ 25 °C			3138 A	
Power @ 35 °C	3172 kVA	3330 kVA	3489 kVA	3647 kVA
AC current @ 35 °C			3052 A	
Power (SN (AC)) @ 50 °C	2883 kVA	3027 kVA	3172 kVA	3315 kVA
AC current (IN (AC)) @ 50 °C			2775 A	
Nominal output voltage (UN (AC)) ⁴⁾	600 V	630 V	660 V	690 V
Output frequency ⁵⁾			50/60 Hz	
Harmonic distortion, current ⁶⁾			< 3%	
Maximum AC short circuit current from network			66 kA (1 s RMS)	
Distribution network type ⁷⁾			TN and IT	
Efficiency				
Maximum ⁸⁾			98.8%	
Euro-eta ⁹⁾			98.6%	
CEC efficiency ⁹⁾			98.5%	
Power consumption				
Own consumption in normal operation			4000 W	
Maximum standby operation consumption			400 W	
Auxiliary voltage type			external ¹⁰⁾	

1) DC/AC ratio close to 2.0 might shorten maintenance intervals

2) Throughout the temperature range

3) Standard 15 DC inputs with negative grounding, fuses on positive pole only. Option available upto 24 DC inputs

4) +/- 10%, consult FIMER for detailed information

5) +/- 10 Hz

6) At nominal power

7) Inverter side must be IT type

8) Without auxiliary power consumption at min UDC

9) Rounded according to CEC rules

10) Internal available as an option


Technical data and types

Product Type designation, PVS980-58	PVS980-58 -3260-I	PVS980-58 -3423-J	PVS980-58 -3586-K	PVS980-58 -3750-L
Dimensions and weight				
Width/Height/Depth, mm (W/H/D)	4389/2350/1634			
Weight appr.	Max. 5000 kg			
Environmental limits				
Degree of protection	IP65 Electronics section & IP55 rest of Inverter /Type 3R, sand test certified			
Ambient temp. range ¹¹⁾	-20 ... +50 °C			
Maximum ambient temperature ¹²⁾	+60 °C			
Relative humidity	4 ... 100%			
Maximum altitude (above sea level) ¹³⁾	4000m ¹⁴⁾ Deration to be considered			
Maximum noise level	84 dBA ¹⁵⁾			
Protection				
Ground fault monitoring	Yes			
Grid monitoring	Yes			
Anti-islanding	Yes			
DC reverse polarity	Yes			
AC and DC short circuit and over current	Yes			
AC and DC over voltage and temperature	Yes			
User interface and communications				
Local user interface	Local control panel			
Analog inputs/outputs	2/1 as standard, extendable as engineered option			
Digital inputs/relay outputs	7/1 as standard, extendable as engineered			
option Fieldbus connectivity	Modbus, Profinet, Ethernet IP ¹⁶⁾			
Product compliance				
Safety and EMC	CE Declaration of Conformity, IEC62109-1, IEC62109-2			
Characteristics IEC62910	IEC60068-2-1, -2, -14, -30, IEC61683, EN50530, IEC61727, IEC62116			
Grid codes	CEA			
Grid support and grid functions	Reactive power compensation, Power reduction, LVRT, HVRT, FqRT			

11) -40 °C as option
 12) Power limiting after 50 °C
 13) Possible power limiting above 1000 m, depending on temperature

14) Standard device up to 2000m, up to 4000m as an option considering the deration
 15) At partial power typically < 75 dBA
 16) More communication options as engineered option

PVS980-58 central inverter block diagram

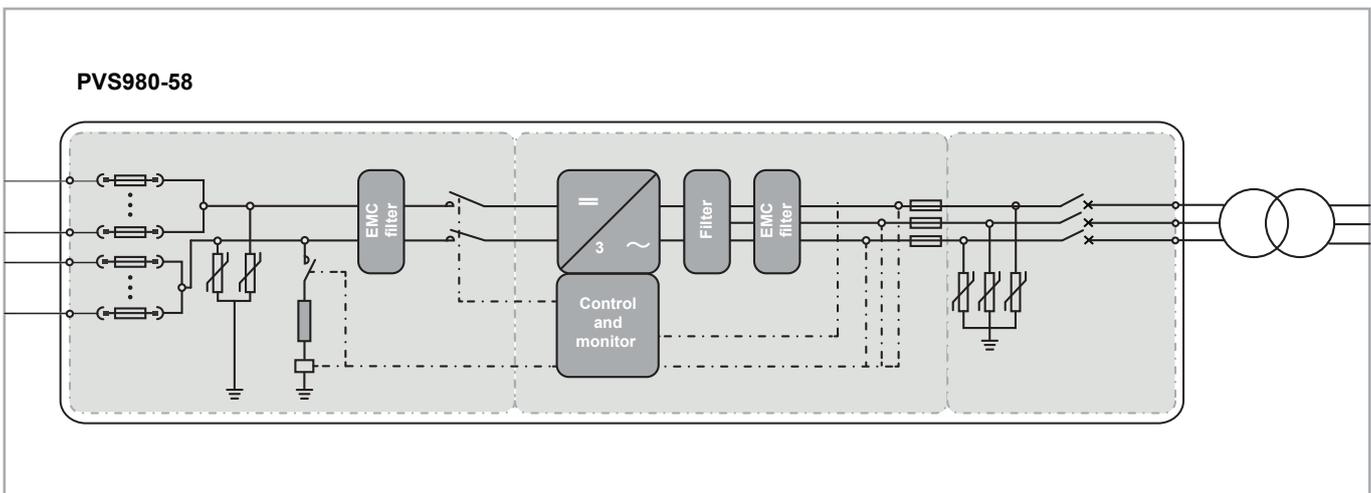

Central inverter

PVS980-58 from 3260 to 3750 kVA



High total performance

- High efficiency
- Low auxiliary power consumption
- Innovative controlled cooling
- Efficient maximum power point tracking
- Long and reliable service life of at least 25 years

Outstanding endurance for outdoor use

- Water- and dustproof outdoor enclosure
- Designed to withstand the toughest environments
- Long and reliable service life following the FIMER life cycle model

Modular industrial design

- Compact and easy-to-maintain product design
- Fast and easy installation
- Integrated and flexible DC input section

Life cycle service and support

- FIMER's extensive global service network
- Extended warranties
- Service contracts
- Technical support throughout the service life

Patented cooling system

- Self-contained, thermosiphon cooled power modules
- Liquid-cooled inverter power ratings with the simplicity of air cooling
- No fillable liquids, pumps, valves, inhibitors, or leaks
- Low maintenance

Versatile design for largescale PV plants

- Fast AC connection with busbars, no AC cable pulling
- Integrated DC connection with variable number of inputs
- Wide standard option palette for tailoring

Minimizes system costs

- Very high output power and small footprint allows cost efficient power block designs
- 1500 VDC system voltage
- Wide ranged and highly efficient MPPT algorithm
- Integrated protection to minimize external components.
- Fast and easy installation and commissioning


Wide communication options

- Complete range of industrial data communication options for SCADA connections
- Ethernet/Internet Protocol
- Remote monitoring

Comprehensive simulation models

- PSS/E
- PSCAD
- DigSilent

Data communication principle for PVS980-58 central inverter

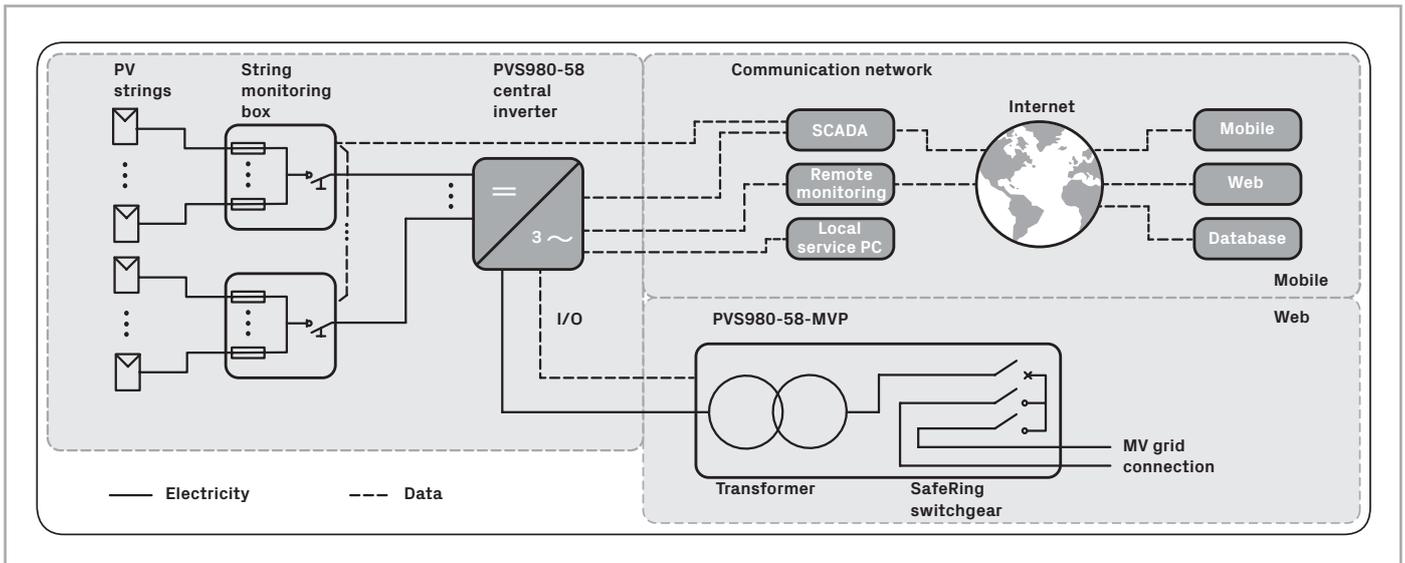

Options

- Integrated and flexible DC input extension
- AC breaker
- Heavy duty (Type 1) surge protection
- Various internal auxiliary power supply options up to 10kVA for customer use
- Floating DC
- Fieldbus and Ethernet connections
- Current measurement to each DC input
- High altitude version
- Low temperature version
- Warranty extensions
- Solar inverter care contracts

Related products

- Integrated products, pad mounted- or compact skid solutions
- String monitoring junction boxes
- Remote monitoring solutions

Support and service

FIMER supports its customers with a global service network and provides a complete range of life cycle services from installation and commissioning to preventative maintenance, spare parts, repairs and recycling.



For more information please contact your local FIMER representative or visit:

fimer.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. FIMER does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of FIMER. Copyright© 2021 FIMER.

